




DockMag

MagSeal

Magnetic attachment Flexible base

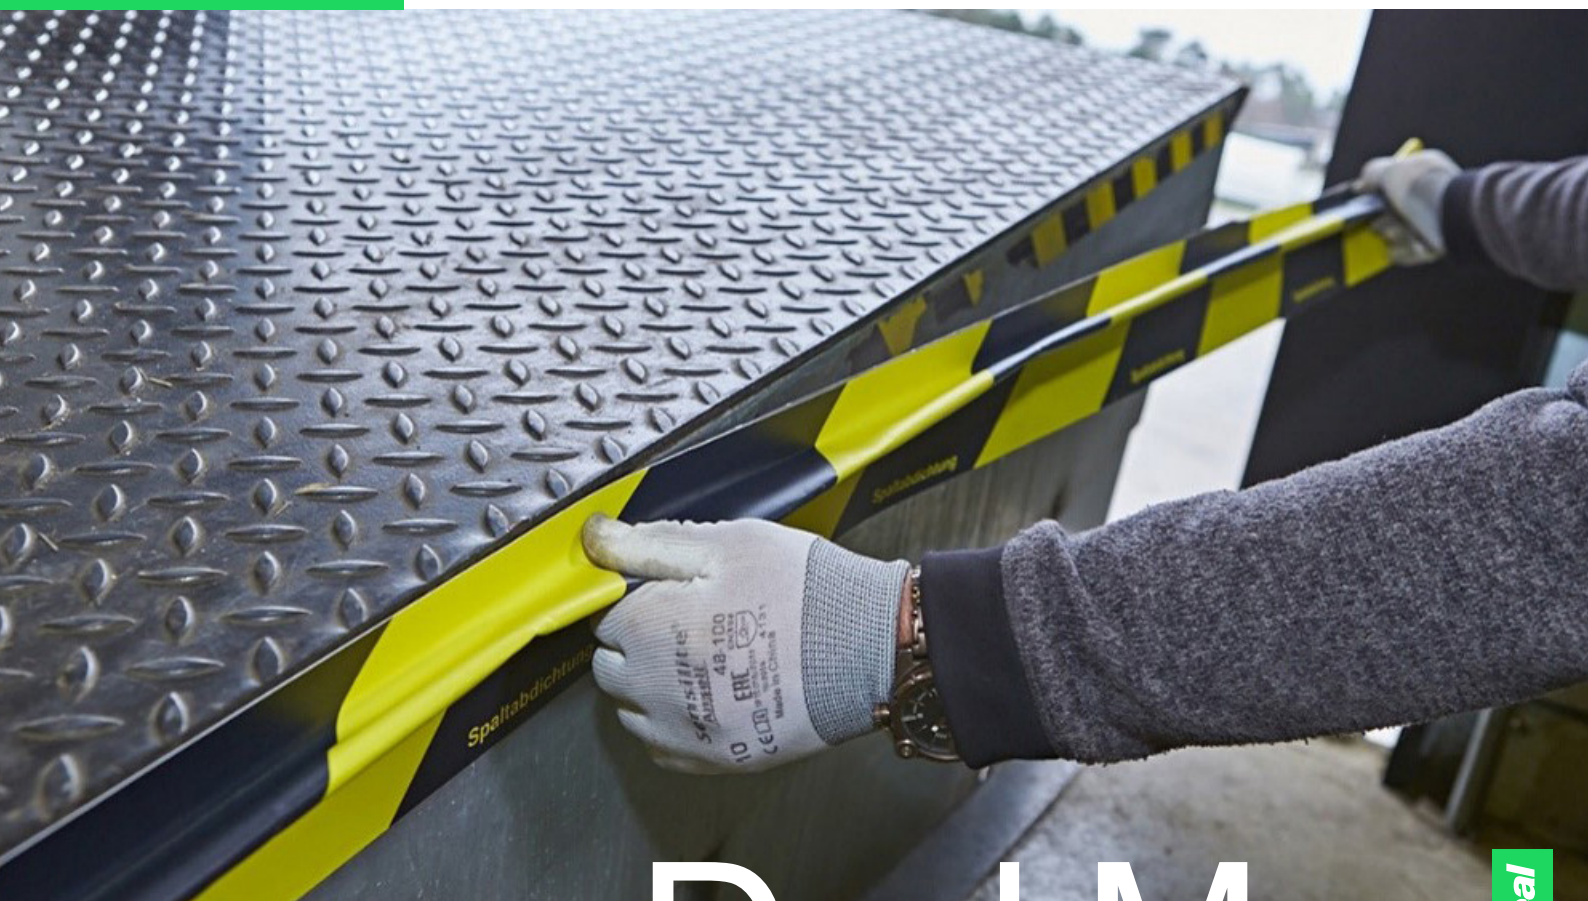

Savings

Environmentally durable solution, reduced repair and maintenance costs.

Health

A safe, dry and draught free working environment for employees.

Installation

Quick, universal installation by unique patented magnetic fastening.

Hygiene

Reduced dust, moisture and air pollution.

Safety

Complies with the international health and safety regulations

DockMag Product specifications

Specifications DockMag for dock levellers

Flexible, fibre-reinforced material for inside and outside applications, UV and mildew resistant.

Temp. resistance	-20C up to +70C
Coating	Acrylate
Tensile strength	2600/2400 (N/5cm) DIN 53354
Tear resistance	250/250 (N) DIN 53386
Built in depth/ width	>4mm/120mm
Colour	Black/yellow logo optional
Permanent magnet	Universal installation
Thickness	> 1,0 mm
Material property	Anisotropic
Bonding capacity	Lifelong (without external influences)



Available sizes/ models


SAML 35 (35 mm lip)	SAML 60 (60mm lip)	SAMLH (Hinge side) (40/60/80mm lip) (1-3 m)	SAML35 Heavy duty (35 mm lip)
1000mm - 2650mm	1000 - 2650mm	1000 - 3000mm	1000 - 2650mm

Heavy Duty MagSeal:

Reinforced with a stainless steel anti-rodent mesh for extra protection.

Also available in complete kits:

Quick to install, covering all sizes and Heavy Duty options.

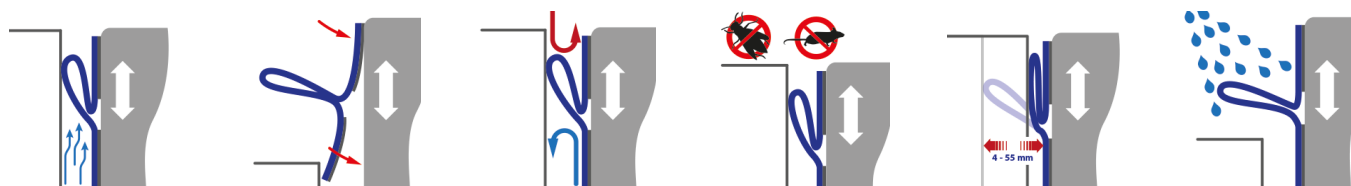

IDD-Parts BV
Hanzeweg 21
3771 NG Barneveld
The Netherlands
T: +31 (0)342 490 990
E: info@iddparts.nl
www.iddparts.nl

IDD-Parts France
Le Loup 13 rue du Morellon
38070 St Quentin Fallavier
France
T: +33 (0) 4 74 82 47 29
E: info@iddparts.fr
www.iddparts.fr

IDD-Parts Deutschland
Hüntestrass 72
26871 Papenburg/ Aschendorf
Germany
T: +49 (0)4962 9969 720
E: info@iddparts.de
www.iddparts.de