MagSeal

Seals for Overhead Doors



DoorMag

MagSeal

Magnetic attachment Flexible base







Savings
Environmentally durable solution, reduced repair and maintenance costs.

Health
A safe, dry and draught free working environment for employees.

Installation
Quick, universal installation by unique patented magnetic fastening.

Anti-rodent
Environmentally durable solution, reduced repair and maintenance costs.

Hygiene
Reduced dust, moisture and air pollution.

Safety
Complies with the international health and safety regulations.

PATENTED

Overhead doors

MagSeal

DoorMag Product specifications

Specifications DoorMag for Overhead doors


Flexible, fibre-reinforced material for inside and outside applications, UV and mildew resistant.


Temp. resistance	-20C up to +70C
Coating	Acrylate
Tensile strength	2600/2400 (N/5cn) DIN 53354
Tear resistance	250/250 (N) DIN 53386
Colour	Standard color 7016 and black/yellow, other RAL or logo optional.
Permanent magnet	Universal installation
Thickness	> 1,0 mm
Material property	Anisotropic
Bonding capacity	Lifelong (without external influences)

Available sizes

DoorMag/ SAMTS

SAMTS40 400mm
SAMTS40 450mm
SAMTS40 480mm

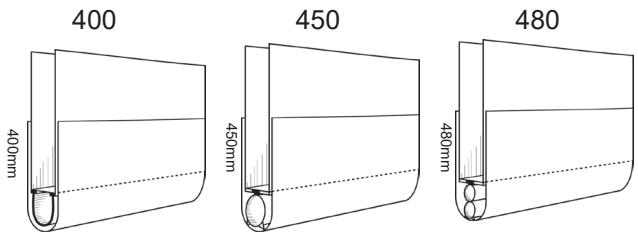




standard length 9200 mm

With stainless steel mesh to keep rodents out.

For aluminium panel use adapter strap SMB.
Order 2x the length.

Available in kits for fast delivery

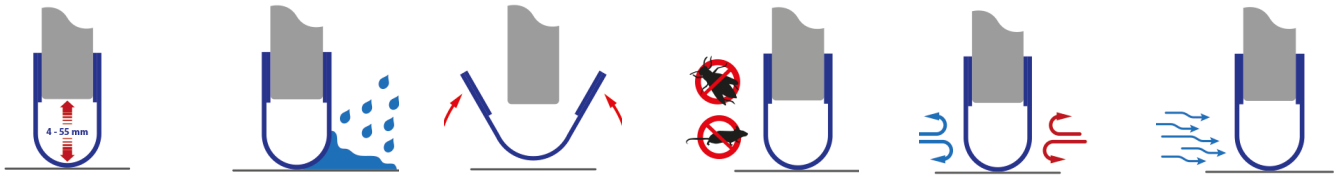

IDD-Parts BV
Hanzeweg 21
3771 NG Barneveld
The Netherlands
T: +31 (0) 342 490 990
E: info@iddparts.nl
www.iddparts.nl

IDD-Parts France
Le Loup 13 rue du Morellon
38070 St Quentin Fallavier
France
T: +33 (0) 4 74 82 47 29
E: info@iddparts.fr
www.iddparts.fr

IDD-Parts Deutschland
Hüntestrasse 72
26871 Papenburg/ Aschendorf
Germany
T: +49 (0) 4962 9969 720
E: info@iddparts.de
www.iddparts.de