
MagSeal

Seals for Pedestrian doors

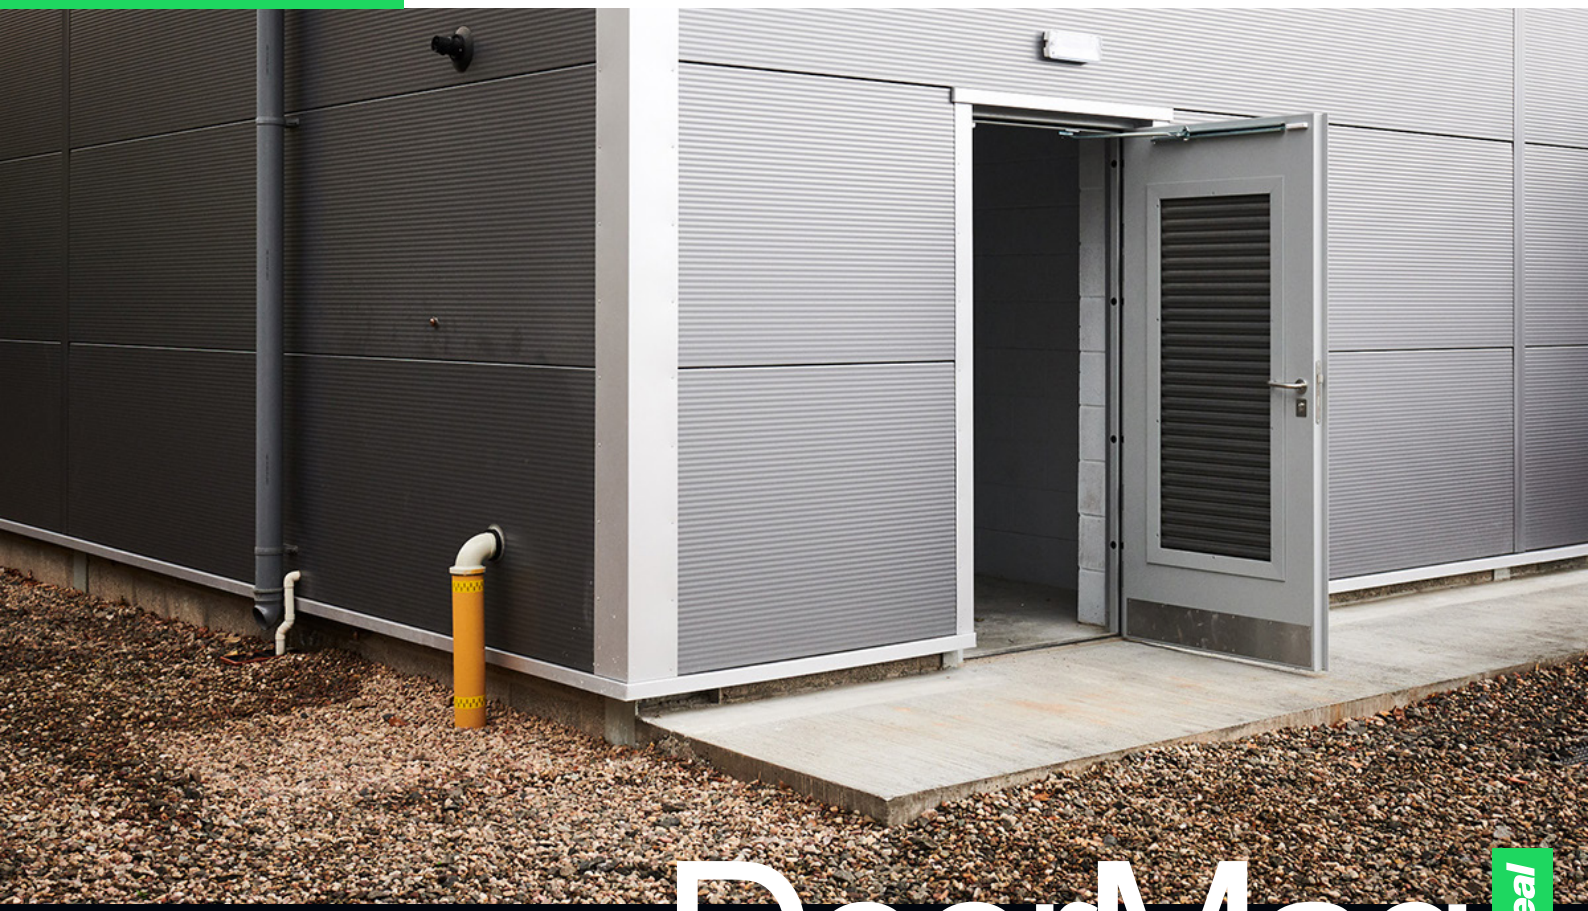



DoorMag

MagSeal

Magnetic attachment Flexible base



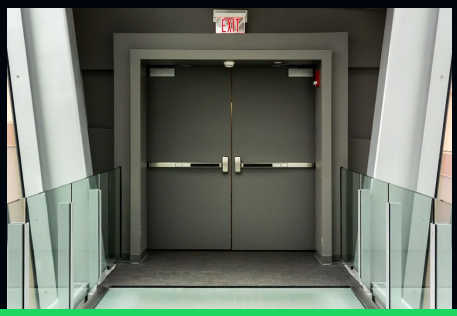

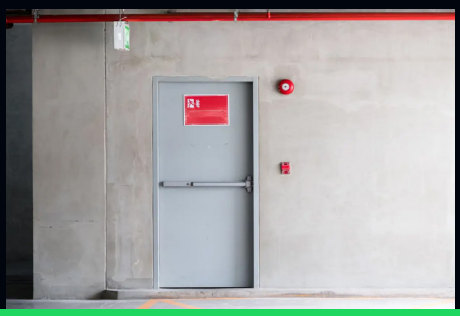

Savings
Environmentally durable solution, reduced repair and maintenance costs.

Health
A safe, dry and draught free working environment for employees.

Installation
Quick, universal installation by unique patented magnetic fastening.

Anti-rodent
Environmentally durable solution, reduced repair and maintenance costs.

Hygiene
Reduced dust, moisture and air pollution.

Safety
Complies with the international health and safety regulations.

PATENTED

MagSeal

Doormag Product specifications

Specifications DoorMag for Pedestrian doors

Flexible, fi bre-reinforced material for inside and outside applications, UV and mildew resistant.

Temp. resistance	-20C up to +70C
Coating	Acrylate
Tensile strength	2600/2400 (N/5cn) DIN 53354
Tear resistance	250/250 (N) DIN 53386
Built in depth/ width	>4mm/120mm
Colour	Standard color 7016
Permanent magnet	Universal installation
Thickness	> 1,0 mm
Material property	Anisotropic
Bonding capacity	Lifelong (without external influences)


Available sizes

DoorMag / SAMT


1,000 mm	100
1,500 mm	150
2,500 mm	250

with stainless steel mesh to keep rodents out.

For non-magnetic surfaces, use the SMB adapter band to attach the DoorMag

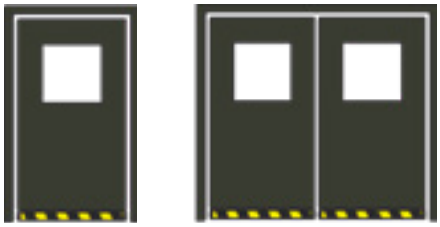

for closing 4 to 55mm gaps

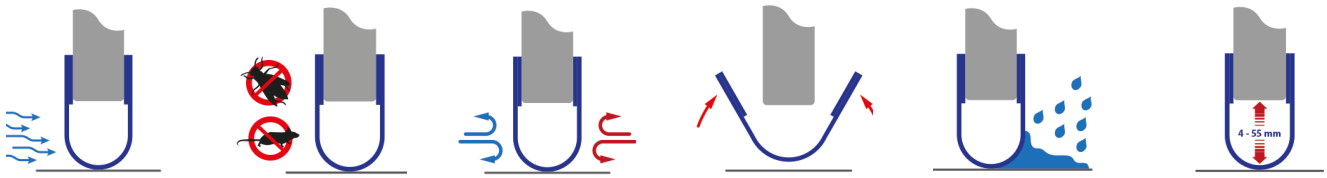

IDD-Parts BV
Hanzeweg 21
3771 NG Barneveld
The Netherlands
T: +31 (0)342 490 990
E: info@iddparts.nl
www.iddparts.nl

IDD-Parts France
Le Loup 13 rue du Morellon
38070 St Quentin Fallavier
France
T: +33 (0) 4 74 82 47 29
E: info@iddparts.fr
www.iddparts.fr

IDD-Parts Deutschland
Hüntestrasse 72
26871 Papenburg/ Aschendorf
Germany
T: +49 (0)4962 9969 720
E: info@iddparts.de
www.iddparts.de